


**MAUSER**  
S P E Z I A L

**新一代热风焊接机**

**Programmable hot-air welding machine**

**MW1720**



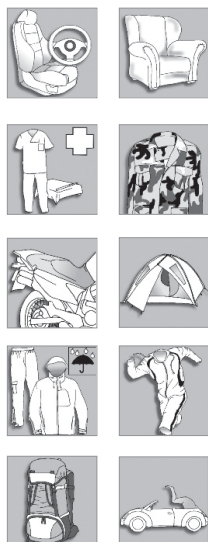

## 机器说明/Machine Description

本型号热风机能适用于所有可热压面料，其性能在同类型设备中处于领先地位，主要针对中高端产品而开发。交互式人机对话与优化的人体工程学相结合使得操作更加便捷，性能更加稳定。同时可以根据客户的要求，开发专用的结构和功能。

This type of hot air welding technology can be applied to all heat-press fabrics, and its performance is in a leading position among the same type of equipment, mainly developed for high-end products. The combination of interactive human-machine dialogue and optimized ergonomics makes the operation more convenient and the performance more stable. At the same time, we can develop special structures and functions according to customer requirements.

## 产品特点/Features

- 上下轮独立驱动可差速运行 (上轮速度可以大于或小于下轮)  
Independent drive of upper and lower wheels can run at differential speed (upper wheel speed can be higher or lower than lower wheel)
- 关键参数可自主加密锁定  
Key parameters can be independently encrypted and locked
- 自适应送带系统稳定可靠  
Self-adaptable tape feeding system is stable and reliable
- 独立的带头、带中、带尾参数杜绝打折  
Independent tape start, middle and end parameters to avoid wrinkles
- 可根据用户要求特殊定制  
Customized order according to user requirements available
- 控制程序持续免费升级  
The program control software continues to be upgraded for free

## 技术参数/Technical parameter

- |   |   |
|---|---|
| ● 供电：单相220伏；50/60赫兹<br>Power supply: single phase 220V; 50/60 Hz  | ● 功率：3600瓦<br>Rated power: 3600 watts           |
| ● 压缩空气：0.2-0.7兆帕<br>Compressed air: 0.2-0.7Mpa  | ● 工作速度：0 - 15米/分钟<br>Working speed: 0-15m / min |
| ● 工作温度：100 - 800摄氏度<br>Operating temperature: 100 - 800 degrees Celsius                                 | ● 风嘴宽度：22毫米<br>Nozzle width: 22 mm              |
| ● 上压轮宽度：25.4毫米<br>Width of upper wheel: 25.4 mm   | ● 下压轮宽度：31.0毫米<br>Width of lower wheel: 31.0 mm |
| ● 总体积：1200毫米x600毫米x1680毫米 (长x宽x高)<br>Overall volume: 1200 mm x600 mm x1680 mm (Length x width x height) | ● 总体重量：130 KG<br>Total weight: 130 KG           |



关注企业微信公众号  
上工申贝集团



关注企业微信公众号  
DAPShanghai



### 上工申贝（集团）股份有限公司 Shang Gong Group Co., Ltd.

上海市浦东新区新金桥路1566号金苑楼  
Jinyuan Building, 1566 Xinqinqiao Road,  
Shanghai 201206, China

Tel :+(86)21 6393 8822

Fax:+(86)21 6307 8413

E-mail:info@dap-china.com

Internet:www.sgsbgroup.com